


GNS-SERIES

4 SIDES MOULDER WITH SLICER

Combined 4 sides moulding and slicing functions in one unit.

A versatile machine combining four sides moulding and slicing in one. Designed and engineered for efficient machining for compound parquet. It

lets you enjoy superior operation performance, superior product quality and profitable production.

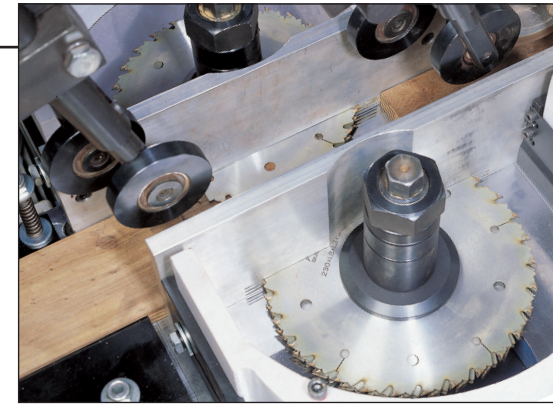

OUTSTANDING SLICING PERFORMANCE

The superior slicing mechanism assures accurate and productive operations.

When requested, the mechanism is available to fit with sawblade air cooling system to reduce sawblade temperature while extending sawblade service life.


The saw spindle is also available to equip with frequency inverter control. It permits for variable speed adjustment to suit wood material variation.



SPINDLE ARRANGEMENT


4-Spindle GNS-4S18

Feed motor: 5HP Elevation motor: 1/2HP

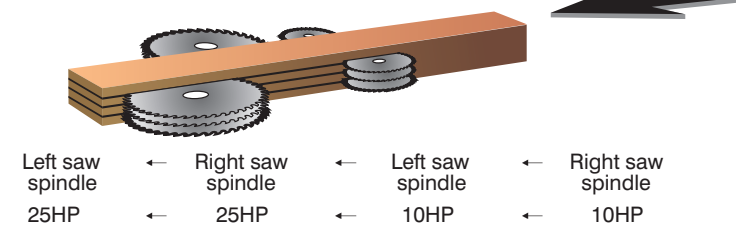


5-Spindle GNS-5S18

Feed motor: 5HP Elevation motor: 1/2HP

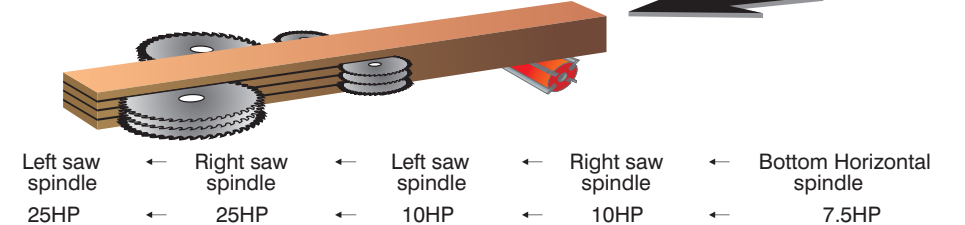


6-Spindle GNS-6S18

Feed motor: 5HP Elevation motor: 1/2HP

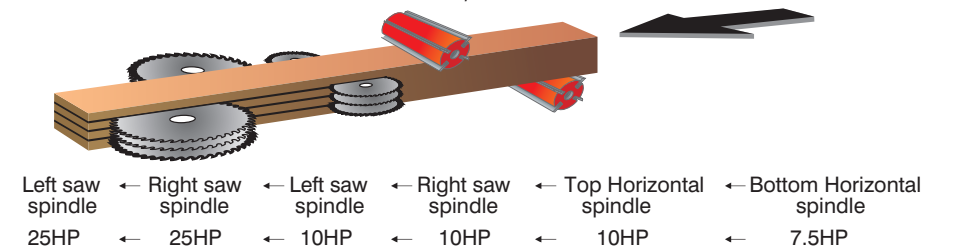

8-Spindle GNS-8S23

Feed motor: 7.5HP Elevation motor: 1HP

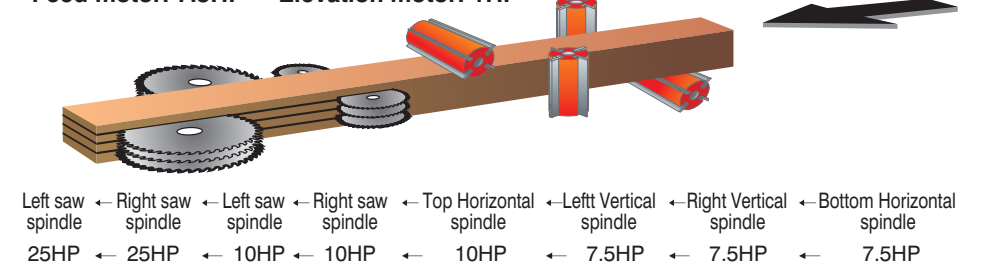

GAU JING

MODEL	GNS-4S18	GNS-5S18	GNS-6S18	GNS-8S23
Planing width	-	-	-	10~230 mm
Planing thickness	125 mm	125 mm	125 mm	7~160 mm
Feeding motor	5 hp	5 hp	5 hp	7.5 hp
Feeding speed	6~24 m/min	6~24 m/min	6~24 m/min	6~36 m/min
Spindle motor	10/15 hp	10/15 hp	10/15 hp	7.5/10/15 hp
Spindle speed	-	-	-	6000 rpm
Spindle diameter	ø40 mm	ø40 mm	ø40 mm	ø40 mm
Cutter diameter	-	ø125 mm	ø125 mm	ø100~ø180 mm
Rear saw spindle dia.	ø300 mm	ø300 mm	ø300 mm	ø300 mm
Slicing width	180 mm	180 mm	180 mm	180 mm
Saw spindle speed	4000 rpm	4000 rpm	4000 rpm	4000 rpm
Vertical spindle adjustment	-	-	-	60 mm
Vertical saw spindle elevation adjustment	5 mm	5 mm	5 mm	5 mm
Table adjustment	-	12 mm	12 mm	12 mm
Table length	1800 mm	1800 mm	1800 mm	1800 mm
Machine dimension LxWxH	3250 x 2100 x1950 mm	3800 x 2100 x1950 mm	4550 x 2100 x1950 mm	5250 x 2100 x1950 mm
Packing dimension LxWxH	3400 x 2280 x 2100 mm	3950 x 2280 x2100 mm	4670 x 2280 x2100 mm	5400 x 2280 x 2100 mm
Net Weight	3600 kgs	4000 kgs	4800 kgs	5700 kgs
Gross Weight	4200 kgs	4700 kgs	5500 kgs	6500 kgs

■ Specifications and design characteristics are subject to change without prior notice.

OPTIONAL EQUIPMENT:

- Feed speed controlled by frequency inverter
- Automatic feed system
- Saw spindle controlled by frequency inverter
- Sawblade air cooling system



GAU JING MACHINERY INDUSTRIAL CO., LTD.

No.33, Lane 355, Pu Zei St., Feng Yuan 420, Taichung, Taiwan.
 TEL: 886-4-2527 4116 (Rep.) FAX: 886-4-2528 2376
<http://www.gaujing.com> <http://www.foursidesplaner.com>
 E-mail: g8664278@ms47.hinet.net

AGENT:

SUNWAY NO.0779512 TEL:04-26227907

Smooth Performance in Action

4 SIDES MOULDER WITH SLICER

GNS series

*Also features compound
parquet slicing function.*

